



Liebert®

DataMate™

Economical, Space-Saving Cooling  
Systems For Sensitive Electronics



## Precision Cooling Designed To Fit The Smallest Spaces

Liebert® DataMate™ precision environmental systems are the perfect solution for cramped quarters requiring temperature and humidity control for sensitive electronics. And while the systems are matched to meet the needs of computers, they are also designed to be convenient for the people sharing space with the protected equipment.

**Space-saving.** The slim, compact Liebert DataMate may be wall- or floor-mounted, and requires minimal service access, limiting floor space requirements.

**High sensible cooling capacity.** Unlike “comfort” air conditioners, Liebert precision cooling systems are designed for the cooling requirements of electronic equipment—80% of the capacity dedicated to the removal of dry “sensible” heat, and 20% for control of humidity.


**Reliable.** The Liebert DataMate installed-base is a testimonial to system reliability. Components include a compressor; a high efficiency copper-tube, aluminum-fin evaporator coil; and a double inlet, direct drive fan.

**Quiet.** The units are designed to operate quietly with the compressor vibration-isolated from the chassis. The cabinet is

also insulated to further ensure quiet operation. On many models, the compressor-containing condensing unit can be remotely located to further reduce noise levels in the controlled space. Quiet-Line outdoor condensing units are available for 6-8 dba sound level reduction over the standard models.

**Flexibility options.** Liebert DataMate 60Hz systems are available in capacities of 1.5, 2 and 3 tons in air, water, glycol, and a self-contained 3 ton chilled water model (3-Ton models only in 50Hz). Systems may be configured as self-contained or separated from the condensing unit, depending on the model.


**Easy installation.** All Liebert DataMate components are precharged, and require no field brazing, evacuation or charging. Precharged refrigerant lines are available to connect evaporator and remote

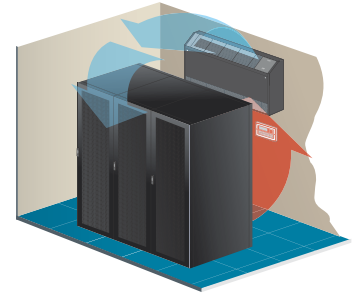


condensing unit modules when required.

**Two-speed fan operation.** High speed provides quiet operation and maximum cooling. Low speed provides maximum dehumidification and lowest sound level. The speed can be automatically or manually selected.


**Corrosion-Resistant Cabinet.** Durability is ensured with Powder Coated Paint panels.




Outdoor Air Cooled. Suitable for roof or ground level site. The condensing unit is designed for operation as low as -30°F.




Indoor Air Cooled. For high-rise and other applications where roof or ground level locations are impractical. May be located above the dropped ceiling and ducted to the outside. Designed for operation down to -20°F ambient.




The compact Liebert DataMate system requires minimal floorspace; when wall-mounted, no floorspace is required.



Water/Glycol Cooled Remote. Utilizes an existing water or glycol loop. Condensing unit is located under the raised floor or above the dropped ceiling.



Water/Glycol Cooled Integral. Totally packaged. A single power and water supply connection puts the unit in operation.



Chilled Water. This unit simply connects to a chilled water loop, for quick and easy installation.

## Specifications

	60HZ				50HZ			
	AIR-COOLED SYSTEM							
	with Outdoor Condensing Unit Split System		with Indoor Condensing Unit Split System		with Outdoor Condensing Unit Split System		with Indoor Condensing Unit Split System	
<b>Evaporator</b>	DME020E	DME027E	DME037E	DME027E	DME037E	DME037E	DME037E	DME037E
<b>Condensing Unit</b>	PFH020A	PFH027A	PFH037A	MCD24A	MCD36A	PFH036A	MCD35A	MCD35A

Net Capacity Data\* - kW (Btuh) - High Fan Speed

<b>80°F DB (26.7°C)</b> <b>38 %RH</b>	Total	5.40 (18,500)	7.10 (24,200)	10.1 (34,600)	6.85 (23,300)	9.60 (32,700)	9.90 (33,800)	9.45 (32,300)
	Sensible	5.40 (18,500)	7.10 (24,200)	9.70 (33,100)	6.85 (23,300)	9.40 (32,000)	8.85 (30,200)	8.65 (29,500)
<b>75°F DB (23.9°C)</b> <b>45 %RH</b>	Total	5.05 (17,200)	6.60 (22,500)	9.75 (33,200)	6.35 (21,700)	9.15 (31,300)	9.55 (32,500)	9.10 (31,100)
	Sensible	4.90 (16,700)	6.50 (22,200)	8.60 (29,400)	6.35 (21,600)	8.35 (28,500)	7.90 (26,900)	7.70 (26,300)
<b>72°F DB (22.2°C)</b> <b>50 %RH</b>	Total	4.85 (16,500)	6.35 (21,700)	9.50 (32,400)	6.10 (20,800)	8.95 (30,600)	9.30 (31,800)	8.90 (30,400)
	Sensible	4.50 (15,400)	6.05 (20,600)	7.95 (27,100)	5.90 (20,100)	7.70 (26,200)	7.30 (24,900)	7.10 (24,300)

	60HZ				50HZ					
	WATER COOLED				GLYCOL COOLED		WATER COOLED		GLYCOL COOLED	
	<b>Evaporator</b>	DME020E	DME027E	DME037E	DME020E	DME027E	DME037E	DME037E	DME037E	DME037E
<b>Condensing Unit</b>	DMC022WG	“DMC029WG/ MCD26W”	“DMC040WG/ MCD38W”	DMC022WG	“DMC029WG/ MCD26W”	“DMC040WG/ MCD38W”	MCD37W	MCD37W	MCD37W	

Net Capacity Data\* - kW (Btuh) - High Fan Speed

<b>80°F DB (26.7°C)</b> <b>38 %RH</b>	Total	5.90 (20,100)	7.95 (27,200)	11.4 (38,900)	5.15 (17,600)	6.75 (23,000)	9.65 (32,900)	11.3 (38,700)	9.30 (31,800)
	Sensible	5.80 (19,800)	7.90 (27,000)	10.3 (35,300)	5.15 (17,600)	6.75 (23,000)	9.40 (32,100)	9.55 (32,600)	8.60 (29,300)
<b>75°F DB (23.9°C)</b> <b>45 %RH</b>	Total	5.50 (18,800)	7.55 (25,800)	11.0 (37,400)	4.80 (16,300)	6.25 (21,300)	9.20 (31,400)	11.0 (37,400)	8.95 (30,500)
	Sensible	5.15 (17,600)	7.10 (24,200)	9.20 (31,400)	4.75 (16,200)	6.25 (21,300)	8.35 (28,500)	8.55 (29,200)	7.60 (26,000)
<b>72°F DB (22.2°C)</b> <b>50 %RH</b>	Total	5.35 (18,100)	7.35 (25,000)	10.7 (36,600)	4.60 (15,700)	6.00 (20,500)	8.95 (30,600)	10.7 (36,600)	8.75 (29,900)
	Sensible	4.75 (16,200)	6.55 (22,300)	8.55 (29,100)	4.35 (14,900)	5.85 (19,900)	7.70 (26,300)	7.95 (27,200)	7.05 (24,000)

	60 HZ		50 HZ	
	CHILLED WATER			
	<b>Evaporator</b>	DME044C	DME044C	DME044C
<b>Condensing Unit</b>	DME044C	DME044C	DME044C	DME044C

Net Capacity Data\* - kW (Btuh) - High Fan Speed

<b>80°F DB (26.7°C)</b> <b>38 %RH</b>	Total	10.5 (36,000)	9.1 (31,100)
	Sensible	9.65 (32,900)	8.3 (28,200)
<b>75°F DB (23.9°C)</b> <b>45 %RH</b>	Total	8.45 (28,900)	7.6 (25,900)
	Sensible	7.95 (27,100)	6.8 (23,200)
<b>72°F DB (22.2°C)</b> <b>50 %RH</b>	Total	7.65 (26,100)	6.6 (22,600)
	Sensible	6.90 (23,500)	5.9 (20,200)




### Microprocessor control system.

The microprocessor control system, with its user-friendly wall-mount display, provides precise temperature and accurate alarm setpoints. Using touch-sensitive buttons, the monitor/control panel allows you to select and display time, temperature, humidity, alarm indication and other parameters.



Standard 60Hz units are CSA certified to the harmonized U.S. and Canadian product safety standard, CSA C22.2 No 236/UL 1995 for “Heating and Cooling Equipment” and are marked with the CSA c-us logo.

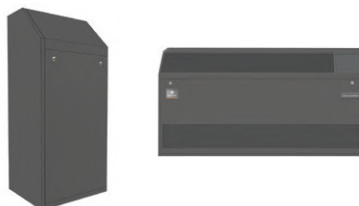

Indoor and outdoor condensing unit options maximize Liebert DataMate installation options for better system flexibility. Outdoor models are available in Quiet-Line and High Ambient versions.



**VertivCo.com** | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2017 Vertiv Co. All rights reserved. Vertiv and the Vertiv logo are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.